




High Resolution Linear Hall Encoder

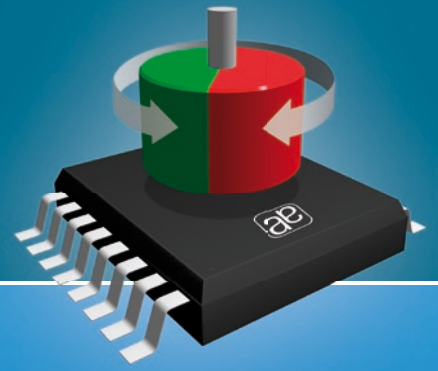

AS5311 First magnetic encoder to break into submicron resolution range

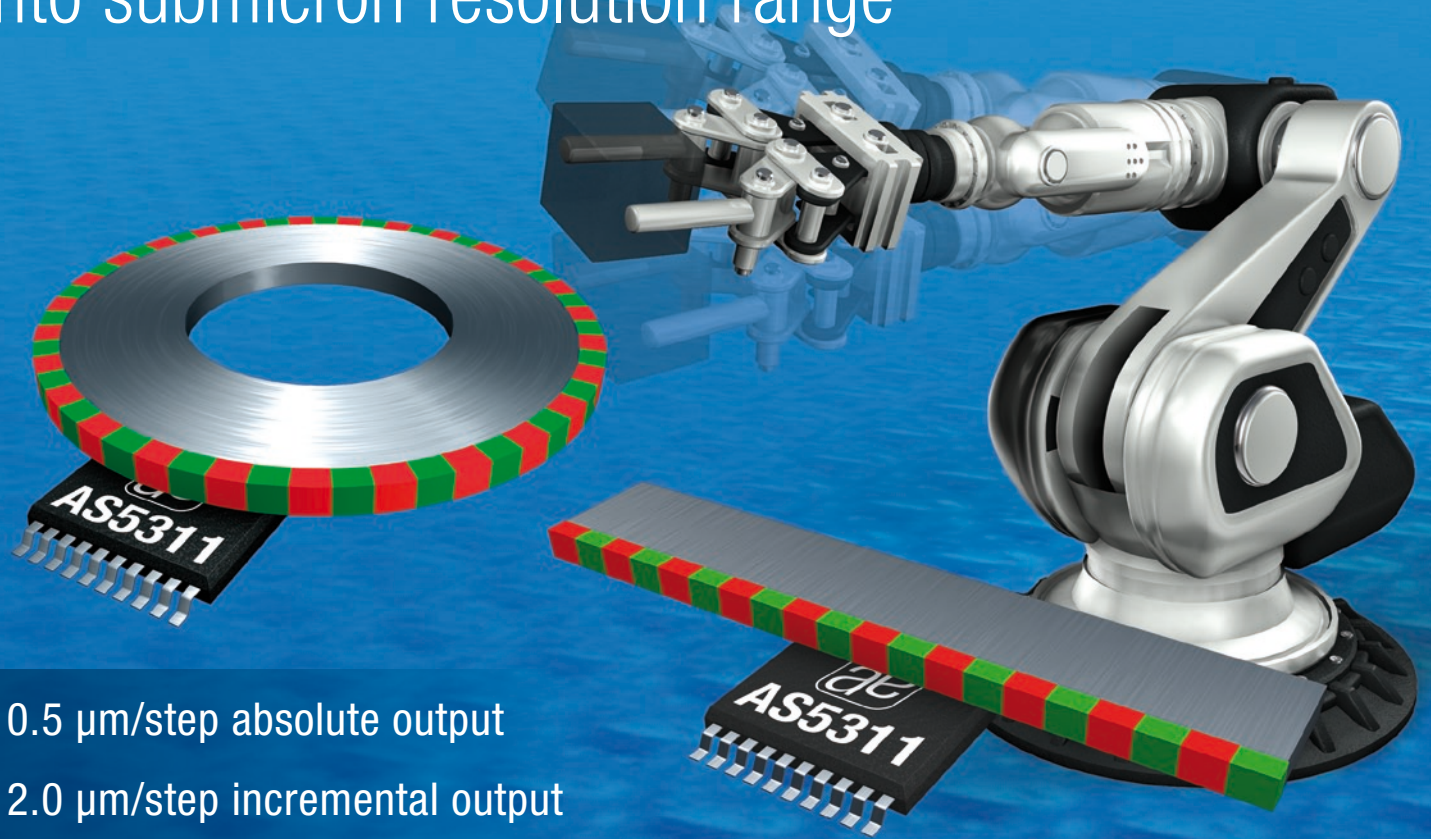

- ▶ 0.5 $\mu\text{m}/\text{step}$ absolute output
- ▶ 2.0 $\mu\text{m}/\text{step}$ incremental output
- ▶ 650 mm/s linear speed

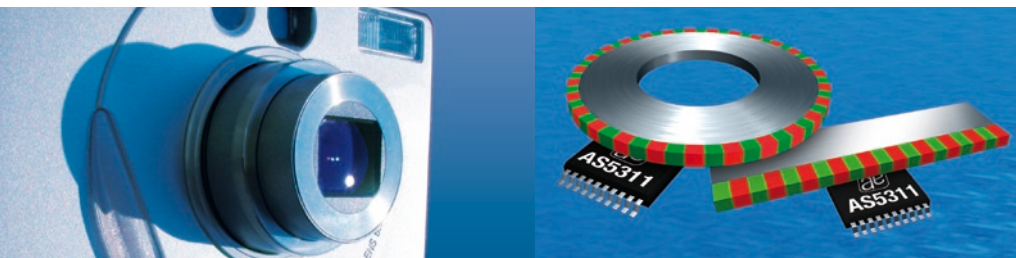

www.austriamicrosystems.com
 industry@austriamicrosystems.com
 © 04/2009 by austriamicrosystems AG
 Subject to change without notice

Headquarters
 austriamicrosystems AG
 Tobelbader Strasse 30, 8141 Unterpremstaetten, Austria
 Phone +43 3136 500-0 · Fax +43 3136 525-01

General Description

The AS5311 is a contactless high resolution magnetic linear encoder for accurate linear motion and off-axis rotary sensing with a resolution down to $<0.5\mu\text{m}$. It is a system-on-chip, combining integrated Hall elements, analog front end and digital signal processing on a single chip, packaged in a small 20-pin TSSOP package.

A multi-pole magnetic strip or ring with a pole length of 1.0mm is required to sense the rotational or linear motion. The magnetic strip is placed above the IC at a distance of typical 0.3mm.

The absolute measurement provides instant indication of the magnet position within one pole pair with a resolution of 488 nanometers per step (12 bit over 2.0mm). This digital data is available as a serial bit stream and as a PWM signal.

Furthermore, an incremental output is available with a resolution of $1.95\mu\text{m}$ per step. An index pulse is generated once for every pole pair (once per 2.0mm).

The travelling speed in incremental mode is up to 650mm/second.

An internal voltage regulator allows the AS5311 to operate at either 3.3 V or 5 V supplies.

Depending on the application the AS5311 accepts multi-pole strip magnets as well as multi-pole ring magnets, both radial and axial magnetized.

The AS5311 is available in a Pb-free TSSOP-20 package and qualified for an ambient temperature range from -40°C to $+125^{\circ}\text{C}$.

Key Features

- Two 12-bit digital absolute outputs:
 - Serial interface and
 - Pulse Width Modulated (PWM) output
- Incremental output with Index
- Extended diagnostic features for monitoring magnet placement over the chip

Benefits

- Complete system-on-chip
- Flexible system solution provides absolute, PWM and incremental outputs simultaneously
- Ideal for applications in harsh environments due to contactless position sensing
- No calibration required
- High resolution:
 - $0.488\mu\text{m}$ absolute
 - $1.95\mu\text{m}$ incremental

Applications

- Micro-Actuator feedback
- Servo drive feedback
- Robotics
- Replacement of optical encoders

